

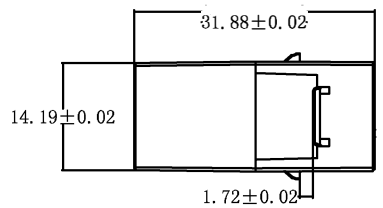



? Autodesk ???????



NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING :125V AC RMS
- 2. CURRENT RATING :1.5A mp
- 3. CONTACT RESISTANCE :100 MILLI OHMS MAX
- 4. INSULATION RESISTANCE :1000M OHMS MIN@ 500V DC
- 5. DIELECTRIC STRENGTH :750V AC RMS 60Hz, 1MIN
- 6. CAT.6A PERMANENT LINK: CONFORM TO ANSI/TIA/EIA-568 B.2-1 ISO/IEC 11801:2002 CLASS EA

ENVIRONMENTAL:

- 1. Storage : -40 TO+70°
- 2. Operation : -10° TO+60°

MECHANICAL

- 1. SHIELD MATERIAL BRASS C2680 T=0.25MM
- 2. HOUSING MATERIAL PC UL94V0
- 3. CONTACT MATERIAL PHOSPHOR BRONZE PLATING GOLD
- 4. RJ45 JACK LIFE:750 TIMES MIN
- 5. RETENTIVENESS OF INSERTION STRUCTURE :50N 60±5S

MATERIAL LIST:

②	RJ45 JACK	Housing-fireproof PC Pin-8P8C 3u" gold plated		
①	PCB	1.2mm		

RoHS 2.0 and REACH COMPLAINT

CopperLed		Shenzhen Copperled Technology Co.,Ltd			
CUSTOMER	CL-K1-C5A07				
PRODUCT NAME					
BY	NEW	DATE	REV.	A	
BY	REVISION RECORD MODIFICATIONS		DATE	REV.	
			WANG	LI	

Autodesk ???????

? Autodesk ???????