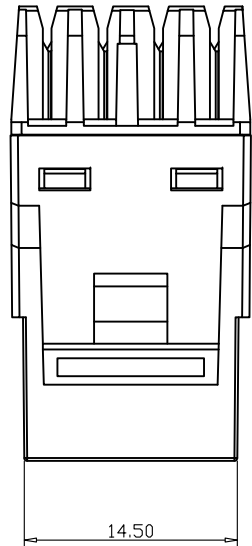




COVER



- Material:**
- 1.RJ45 Housing:PC
 - 2.Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - 3.Contact area: 3-50 micro-inch Gold plated
 - 4.IDC Housing: PC
 - 5.IDC Terminal material & finished:
 - 5-1.Phosphor Bronze with 50 micro-inch Tin-Lead plated. Over 50-60 micro-inch Nickel plated.
 - 5-2.Use for 22-26 AWG stranded and solid wire
 - 6.Jack Bracket Set:ABS Black color
 - 7.PCB: FR4 UL 94V0
- Performance:**
- a.The IDC color combine two wirings of T568A & T568B.
 - b.Insertion Force: 900 grms for 8 contacts
 - c.Retention Strength: 7.7kgs between Jack and Plug
 - d. Operation Temperature: -40°C to 70°C.
 - e.Durability:
 - e-1.Jack:750 cycles Plug-Jack mating and unmating test.
 - e-2. IDC: Max 200 punching times.

TITLE:			 Shenzhen Copperled Technology Co.,Ltd CopperLed	
	INCH	MM		
.X	.015	.30	UTP Cat.6 Keystone Jack 180 TITLE: degree Green Color	
.XX	.010	.10		
.XXX	.005	.05		
DRAWN BY	MA		P/N: CL-KJU-C621	
CHECK BY	SCALE	1:1		REV
	UNIT	MM		
APPD BY	SHEET	1/1	DWG NO:	
	DATE	2021/06/25		