




# Cat.6 48 Port Patch Panel with Back Bar

UTP Cat.6 Patch Panel 48Port Dual Use IDC with Back Bar  
CL-U48P-C601

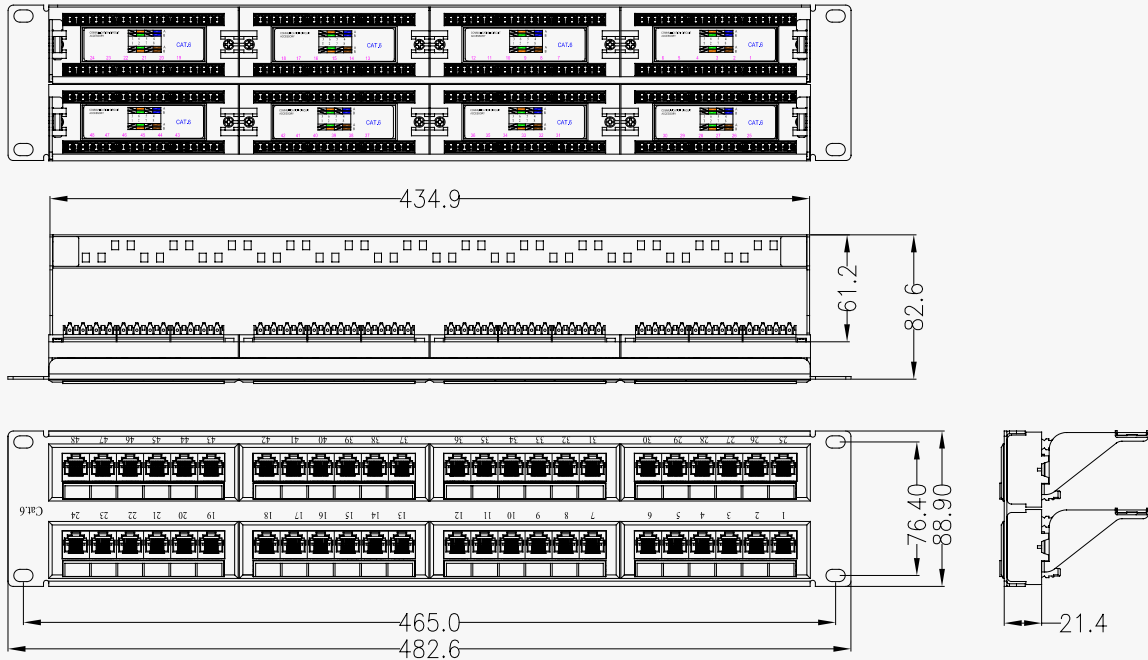

## NOTES:

### ELECTRICAL:

- 1.VOLTAGE RATING : 125 VAC RMS
- 2.CURRENT RATING : 1.5 AMP
- 3.CONTACT RESISTANCE :100 MILLIOHMS MAX
- 4.INSULATION RESISTANCE :1000 MEGOHMS MIN @ 500 VDC
- 5.DIELECTRIC STRENGTH :750 VAC RMS 60Hz,1MIN

### ENVIRONMENTAL:

- 1.STORAGE : -40° TO +85°
  - 2.OPERATION : 0° TO 70°
- CONFORM TO ANSI/TIA/EIA-568 B.2-1  
MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

### MECHANICAL:

1. HOUSING MATERIAL :PBT+15%GF UL94V-0
2. PANEL FRAME :CARBON STEEL, POWDER COATING IN BLACK COLOR
3. CONTACT MATERIAL :PC UL94V-0 CONTACT:PHOSPHOR BRONZE WITH NICKEL PLATING
4. RJ45 JACK LIFE :750 TIMES MIN
5. IDC LIFE :200 TIMES MIN
6. WIRE :AWG 24~26