
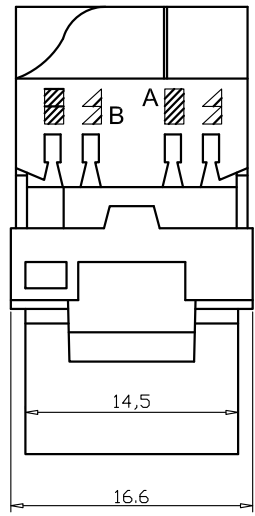



A ↑

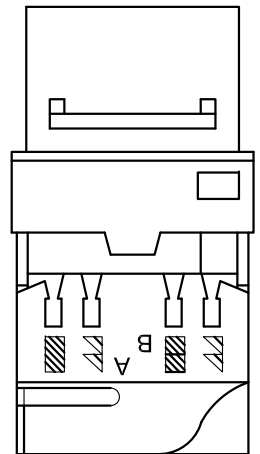

A direction

- Electrical schematic
T568A
- white/blue 5
 - blue 4
 - white/orange 3
 - orange 6
 - white/green 1
 - green 2
 - white/brown 7
 - brown 8
- Electrical schematic
T568B
- white/blue 5
 - blue 4
 - white/orange 1
 - orange 2
 - white/green 3
 - green 6
 - white/brown 7
 - brown 8

Material:
 1.RJ45 Housing:PC
 2.Phosphor Bronze with 50-60 micro-inch Nickel plated.
 3.Contact area: 3-50 micro-inch Gold plated
 4.IDC Housing: PC
 5.IDC Terminal material & finished:
 5-1.Phosphor Bronze with 50 micro-inch Tin-Lead plated. Over 50-60 micro-inch Nickel plated.
 5-2.Use for 22-26 AWG stranded and solid wire
 6.Jack Bracket Set:ABS Black color
 7.PCB: FR4

TITLE:			Shenzhen Copperled Technology Co.,Ltd <i>CopperLed</i>	
	INCH	MM		
.X	.015	.30	TITLE: UTP Cat.6A Toolless Keystone jack 180 degree	
.XX	.010	.10		
.XXX	.005	.05		
DRAWN BY	MA		P/N: CL-KJ-C6A06	
CHECK BY	SCALE	1:1		REV
	UNIT	MM		
APPD BY	SHEET	1/1	DWG NO:	
	DATE	2018/05/05		